



LYNX MOUSTICK

Trade your grain at the right price



LYNX



PERRY
ENGINEERING
EXCELLENCE

MOUSTICK & LYNX, Two in-line grain samplers for two different applications

MOUSTICK



MOUSTICK is simple, unobtrusive, and functional.

MOUSTICK fits anywhere in your grain handling installation, on flat surfaces as on curved walls (tubes).

MOUSTICK comes in gravity chute mode or with vacuum intake.



MOUSTICK can be installed horizontally (vacuum intake only) or inclined up to 45°.

MOUSTICK is a sampler for many uses:

- inspection before shipment
- inspection after drying
- inspection during unloading
- inspection after cleaning
- and so forth

In a network installation MOUSTICK is ideal for checking the quality of the product at every stage of the transformation process or handling operation. Thanks to its multifunctional adjustable timer, MOUSTICK will sample the quantity desired by the operator, at the frequency that he specifies.




LYNX, the reference for cross-stream diverter samplers used in commercial grain trading transactions

ISO EN NF 24333 (2010/02) states that only samplers sweeping through the full cross section of a stream are fit to provide true samples from a free falling flow of grain.

LYNX is a cross-stream cereals sampler which does not rely on gravity to convey the sample material.

The elimination of a gravity-driven sample transfer allows a substantial reduction of the space requirement of the sampler, especially its height.

LYNX is available in different sizes, allowing it to be installed on many circuits with different flow rates.

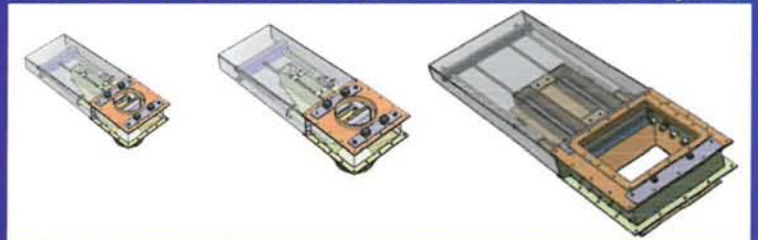

www.perryfoakley.co.uk
+44 (0)1404 890300
sales@perryfoakley.co.uk

